


# g4540 RF Gateway

Dual DVB-T2/C2

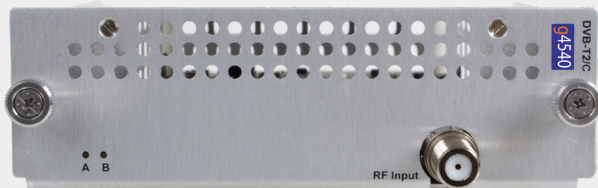

The g4540 RF Gateway receives live free to air TV and radio from terrestrial RF sources and streams them across your IP network. With support for 4K and HEVC video streams, the g4540 provides future-proof IPTV technology.

## Interfaces

- Two DVB-T/T2/C/C2 tuners (single 75 ohm F-type input connector)
- Two 802.3 100/1000BaseT Ethernet (RJ-45 chassis sockets, dual Ethernet features require c1210 Chassis)
- Serial RS232 port for local administration (RJ-45 chassis socket)

## Streaming

- Single program MPEG-2 transport streams (ISO/IEC 13818-1)
- RTP
- UDP
- IP multicast
- IP unicast
- 500 Mbps total output streaming

## Management

- Configurable using management tools:
  - Admin level management using Avedia Server Site Manager
  - HTTPS device web interface; recommended browser: Chrome®
- RESTful API
- Serial RS232 Admin Port
- Event logging via Syslog (local and remote)
- Firmware upgrade
- Configuration backup/restore

## Features & Benefits

- High density product with two DVB-T/T2/C/C2 RF tuners per blade for free-to-air TV or radio channels
- Any stream codec and resolution support
- Advanced filtering to control bandwidth or provide data services such as EPG or MHEG data
- Single blade delivers maximum channel density for minimum rack space
- 5th generation RF Gateway technology delivers high reliability and optimised low power consumption

## Channel Management

- Channel announcement via SAP/SDP
- Interoperable with Samsung LYNK REACH 4 servers
- Stream specific channels from selected multiplexes
- Configurable DVB-T/T2/C/C2 scanning (basic & advanced)
- Multicast/unicast address selection (automatic/manual)
- Configure channel name and number
- Fine-grained control over audio, subtitles and other channel metadata using advanced PID filtering:
  - Create custom SPTS streams containing elements from a channel
  - Filters on PSI data, table types and PID number
  - Unlimited number of PIDs filtered

## RF Input

- Maximum data rate of 72Mbps per transport stream
- Input frequency range: 42-1002 MHz

### DVB-T (ETSI EN 300-744)

- -79.6dBm (8K, 64 QAM, Code Rate 2/3)
- Signal modulation / coding:
  - FFT 2K, 8K
  - QPSK, 16QAM, 64QAM
- Code rate 1/2, 2/3, 3/4, 5/6, 7/8
- Guard interval 1/4, 1/8, 1/16, 1/32
- FEC: Reed Solomon & Viterbi
- Channel Bandwidth: 6 MHz, 7 MHz, 8 MHz

### DVB-T2 (ETSI EN 302-755)

- -78.1dBm (8K, 64 QAM, Code Rate 2/3, DTG 104)
- -78.2dBm (32K, 256 QAM, Code Rate 3/5, DTG 106)
- -76.3dBm (32K, 256 QAM, Code Rate 2/3, DTG 109)
- Signal modulation / coding:
  - FFT 1K, 2K, 4K, 8K, 16K, 32K
  - QPSK, 16QAM, 64QAM, 256 QAM
- Code rate 1/2, 3/5, 2/3, 3/4, 4/5, 5/6
- Guard interval 1/4, 19/256, 1/8, 19/128, 1/16, 1/32, 1/128
- FEC: BCH & LDPC
- Channel Bandwidth: 1.712 MHz, 5 MHz, 6 MHz, 7 MHz, 8 MHz

### DVB-C (ETSI EN 300-429)

- -79.6dBm (64 QAM, Code Rate 2/3)
- Signal modulation / coding:
  - 16QAM, 32QAM, 64QAM, 128QAM, 256 QAM
- Channel Bandwidth: 8 MHz
- FEC: Reed Solomon & Viterbi
- Symbol Rates: 1.8 – 7.2 Msym/s
- Roll off: 0.15

### DVB-C2 (ETSI EN 302-769)

- Input sensitivity:
  - -76.3dBm (1024 QAM, Code Rate 3/4)
- Signal modulation / coding:
  - 16QAM, 64QAM, 256 QAM, 1024QAM, 4096QAM
- Code rate: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10
- Guard interval: 1/64, 1/128
- Channel Bandwidth: 6MHz, 8 MHz
- FEC: BCH & LDPC
- Symbol Rates: 1.8 – 7.2 Msym/s
- Roll off: 0.15

## Network

- Linux dual IPv4/IPv6 stack
- DHCP/DHCPv6 or Static IP addressing
- VLAN support for Admin and Streaming network segregation
- Two IEEE 802.3u 100/1000Mbps MDIX Ethernet Interfaces
- Ethernet redundancy - automatic switching to secondary Ethernet if network failure occurs (c1210 Chassis required)

## System

- Linux-based

## Regulatory

- CE:
  - IEC 62368-1: 2018
  - EN55032:2015
  - EN55035:2017
  - EN61000-3-2: 2019
  - EN61000-3-3: 2013 +A1: 2019
- UL/CSA:
  - UL62368-1:2019
  - CSA C22.2 No. 62368-1:2019
- FCC:
  - 47CFR:2011 Part 15, Sub Part B
  - ANSI C63-4:2014
- Australia/New Zealand:
  - AS/NZS 62368:2018

## Protocols

IP (RFC 791), UDP (RFC 768), TCP (RFC 793), ARP (RFC 826), DNS (RFC 1035), DHCP (RFC 2131), ICMP (RFC 792), IGMP v3 (RFC 3376), HTTP (RFC 2616), HTTPS (RFC 2818), Syslog (RFC 3164), NTP (RFC 1305), SAP (RFC 2974), SDP (RFC 4566), RTP (RFC 3550), IPv6 (RFC 8200), DHCPv6 (RFC 8415), SLAAC (RFC 4862), MLD (v2) (RFC 3810), NDP (RFC 4861), SSDP

## Physical Format

- Modular hot-swap blade
  - c1101 Chassis (2 inputs)
  - c1103 Chassis (up to 6 inputs)
  - c1210 Chassis (up to 20 inputs)

## Environment

- Operating Temperature: 0°C ~ 40°C (32°F ~ 104°F)
- Operating Relative Humidity: 10% ~ 90% (non-condensing)

## Dimensions

- L: 275mm x W: 130mm x H: 40mm; weight 0.5kg

## Power

- DC 24V: 14W Typical, 20W Maximum

## MTBF

- Calculated to MIL-HDBK-217F, Notice 2: 59574 hours (6.8 years)

## In the Box

- g4540, dual DVB-T/T2/DVB-C/C2 RF Gateway
- Product Safety Brochure (hard copy)

## Ordering Information (P/N)

- 18520 - g4540 - 2 tuner DVB-T2/C2