

XP2650 End-Point

4K Dual-Decode Weatherproof Outdoor End-Point



4K UHD IPTV end-point which delivers interactive viewing portals, stunning digital signage, and advanced network video decoding. Its fanless design and PoE+ functionality, combined with high-quality 4K graphics, and an IP55-certified weatherproof enclosure make it an excellent choice for demanding signage applications in outdoor environments.

Integrated with VITEC's EZ TV Platform, all end-points are controlled and operated from a central management interface for the day-to-day administration of content, schedules and user access rights. This single point of management simplifies the complexity and costs associated with the initial deployment of an advanced IPTV and digital signage solution and ensures that the system is intuitive to operate, maintain and scale up to constantly enhance the user experience.

Designed with maximum video performance, lowest playback latency and highest reliability in mind, VITEC's IPTV and digital signage end-points feature 100% hardware-based video decoding, quad-HD/dual-4K playback of live IPTV streams or files and solid state components, all packaged in a weatherproof enclosure with no moving parts.

Features & Benefits

- Octa-core CPU, 64-bit RAM, Quad-core GPU, hardware video decoder
- IP55-certified weatherproof enclosure
- AES decryption licence
- UHD graphics
- Play back dynamic digital signage content, combining text, graphics and videos to engage audiences
- Supports up to two 4K or up to four HD IPTV streams or video playback
- Enable viewers to enjoy live and recorded TV, movies, information and more
- Quiet, fanless design
- Plug-and-play connectivity with Power over Ethernet (PoE+)
- Stream playback synchronized across multiple end-points




Technical Specification

Interfaces*	
Network	1 x 100/1000 Mbps
HDMI Digital Video / Audio	2 x HDMI 2.0 w/ 4K, CEC support
Analog Video / Audio	1 x 3.5mm jack stereo line level audio
USB	1 x USB 3.0, 1 x USB 2.0
TVI Control Port	1 x RS-232
IR Remote Control Sensor	✓
IR Extender Support (optional accessory)	✓
Touch interface support, using standard Human Interface Device (HID)	✓
Video Formats	
MPEG-2	Resolutions up to Full HD 1080p60
MPEG-4 AVC (H.264)	Resolutions up to 4K 2160p60 Main 10
HEVC (H.265)	Resolutions up to 4K 2160p60 Main 10
VP9	✓+
HTML5	✓
Maximum Resolution	3840 x 2160
Aspect Ratio	16:9, 4:3
High Dynamic Range (HDR)	✓+
Audio Formats	
MPEG-1 Layer II (ISO/IEC 11172-3)	✓
MPEG-1 Layer III (MP3)	✓+
AAC	✓
AAC-LC/LC+	✓
AAC+	✓
HE-AAC	✓
AC-3/E-AC-3	✓
Streaming Protocols	
UDP TS	✓
Multicast and Unicast	✓
RTP TS	✓
RTSP	✓+
Apple HLS	✓
SRT	✓
Content Protection & DRM	
AES CBC 128/256-bit as part of VITEC Content Protection Solution	✓
Digital Signage Processing	
Multi-Stream Decoding	2 X 4K or 4 X HD streams/files
Picture-in-Picture (PiP)	✓
Alpha Channel	✓
Text/Graphics Overlays	✓
100% Hardware Video Decode	✓
Separate processing of video and graphics with no shared resources	✓
Web Technologies	Hardware accelerated HTML5 browser, with Blob video playback support
Emergency Management	✓
Low-delay playback of live IPTV Streams	up to 200ms decoding latency
Multi-Display Support	Mirrored output on up to 2 discrete displays +
Display Layouts Support	1 x 1
Vertical Signage Support	✓+
4K Graphics	✓+

Power	
PoE/PoE+	PoE+ (IEEE 802.3at – 2009)
External AC-DC PSU	24W Max, 90-264VAC++ (Not IP55)
Physical	
Dimensions	272mm W x 239mm D x 50mm H (10.71" W x 9.43" D x 1.95" H)
Weight	1500g (3.31lb)
Internal Storage	64GB
IR Remote Control	EP+TV Control, 16 unique pairings
Enclosure	Robust aluminum chassis, fanless, 100% silent
Mounting	Built-in brackets
Environmental	
Operating Temperature: PoE/PoE+ External AC-DC PSU	0°C to 50°C (32°F to 122°F), 0°C to 40°C (32°F to 104°F)
Relative Humidity: PoE/PoE+ External AC/DC PSU	5% to 95% (non-condensing) 10% to 90% (non-condensing)
RoHS-Compliant	✓
TAA-Compliant	✓
Ingress protection	IP55
Regulatory	
CE/UKCA	IEC 62368-1, EN 62368-1, EN 55032, EN 61000-3-2, EN 61000-3-3, EN55035 / CISPR 35
UL/CSA	UL62368-1, CSA C22.2 No. 62368-1
FCC	47CFR Part 15, Sub Part B, ANSI C63-4
RCM	AS/NZS 62368

Rear Panel Interface

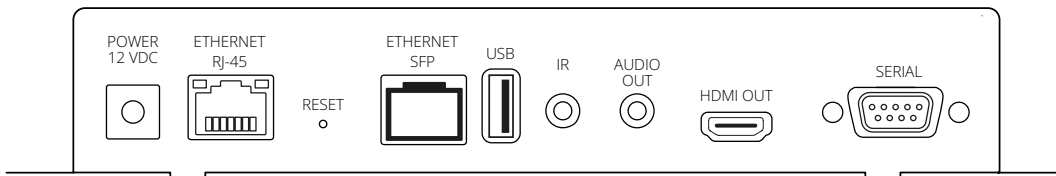

Ordering Information (P/N)

- 19590 - XP2650 End-Point

* Connect up to 4 interfaces

† Future release

†† Separate orderable item